Art. EL-134XAIO-T serie





MEETING ROOM

RoomBooking screen for reservation occupation status + Digital Signage features (logos / videos on screen). Occupation status is indicated OnScreen and LedLight color indication at the sides.

ONLINE MODELS

Reservation via Google Calendar, i-Cal Outlook



TOUCH & PANEL

- 10 points capacitive touch (or non touch panel)
- 13.3inch High Resolution Panel 1920x1080
- 24-7 Usage



ANDROID CHIP & OS VERSIONS

- RK3288 with Android OS 8 or 10
- RK3399 with Android OS 9, 10 and 12
- RK3366 with Android OS 11



ADDITIONAL FEATURES:

- PoE: Power over Ethernet (8 to 21.5inch)
- NFC & RFID (optional)
- Triggering: pushbuttons, sensors
- LED light: external lightstrips

Note: There is no roombooking software installed, please provide your own software or we can provide software.

ANDROID ROOTED

All our models have Rooted Android. The OS system can be adjusted according your needs.

YOUR SOFTWARE

We can pre-install your software apps on the Android OS. We can also make your OS image custommade, with your startup logo.



Easy hangup system at backside (VESA Scew holes plate)



AutoStart by plug in power adapter



WIFI and LAN for internet connection (optional SIM USB dongle)

Certifications:



SOFTWARE OPTIONS

ADD: YOUR SOFTWARE

We can pre-install your software apps on the Android OS. We can also make your OS image custommade, with your startup logo.

ADD: SIGNAGE SOFTWARE

We can pre-install software apps on the Android OS. Find some suggestions below:

KIOWARE: Lockdown your website or App.

FULLY VIDEO: AutoLoop Video from USB stick/Internal

Memory

FULLY WEBSITE: Lockdown your website.

SIGN CONTROLL: Digital Signage with remote controlled pushed presentations with webbased controll system. Create in the CMS presentations and schedule them, online.

Add: external Triggers & Sensors for Video Activation

Optional, Android screens with external triggers and sensors.

We can customize Android displays in the factory for:

- Metal or Plastic Pushbuttons with Lightring and symbols
- Touchless sensor buttons to activate a video
- RFID Sensors for Lift and Learn
- · RFID for "Scan for info"
- Motion detection sensors
- · Light Sensor detection area



Add: (Interactive) LED Light strips and panels

Android screens with external LED strips or LED Panels

We can customize Android displays in the factory for:

- LED strips or LED Panel Light up your product
- Light up your product during a video
- Light up your Display Logo
- Different colors






SPECIFICATIONS:

Model article number			EL-1342AIO-T			EL-1343A	EL-1346AIO-T			
CPU			RK3288; Quad-core cortex A17,1.8G			RK3399; E	Oual-core A72+quad-core A53,1.8G	RK3566; Quad core cortex A55		
RAM			2GB			2GB			Optional 4GB	
Internal memory 16GB			В		16GB		16GB	Optional 32GB/64GB		
Operation system			Android 8.	1/10		Android 9.	0/10	Android 11		
•										
		Touch screer				Point capacitive touch				
		Panel			13.3" LCD panel					
Dis		Resolution			1920x1080					
	Luminance		2		250cd/m2					
		Display mode	,		Normally black					
		Viewing angle			85/85/85(L/R/U/D)					
		Aspect Ratio			16:10					
		WiFi			802.11b/g/n					
Netv	work	Ethernet			100W/1000M ethemet					
		Buletooth			Bluetooth 4.0					
		Card slot			SD card, Max support to 64GB					
Interface		SIM Slot - 4G module			4G Flow card (optional, not included!)					
		USB			USB host					
		Micro USB			Micro USB OTG					
	rface	USB								
					USB for serial (RS232 format / TTL level) RJ45 input with PoE (optional) PoE: IEEE802.3at, POE+, class 4, 25.5W					
		RJ45 with PC								
		Power jack			DC power input					
		Earphone			3.5mm earphone + Micphone					
Media play		Video format			MPEG-1,MPEG-2,MPEG-4,H.263,H.264,VC1,RV etc.,support up to 4K					
		Audio format			MP3/WMA/AAC etc.					
		Photo		jpeg						
					75x75mm					
Other Accessories		Microphone			Built-in single microphone					
		Speaker			2*3W					
		LED Light bar			LED Light bar, RGB					
		RFID			Optional: 125k,ISO/IEC 11784/11785, Support to EM4100, TK4100/GK4100, EM4305, T5577					
		NFC			Optional: NFC 13.56MHz,ISO14443A/ISO14443B/ISO 15693/Mifare classic/Sony felica					
		Camera			Wide-angle 2.0M/P, front camera					
		Working temp			0-40degree					
		Certificates			CE/FCC					
		Language			Multi-language					
		Adapter			Adapter,12V/1.5A					
		User manual			yes					
									<u> </u>	
Product M	easuremen	t, mm								
Unit (Without packaging) Giftbox (With Packagin					g) Carton 5pcs/CTN					
L L	W W	9 <i>)</i> H	I I	W	H H	L	W	Н		
_	209.8mm	31.7mm	443mm	275mm	75mm	458mm	395mm	295mm		
Net(kg)	203.011111	31.7111111	Net(kg)	27 3111111	ı rəmin	Net	55511111	29311111		
ver(kg)			Hethy)			INCL				
						G.W				
						3.11				

DRAWING:

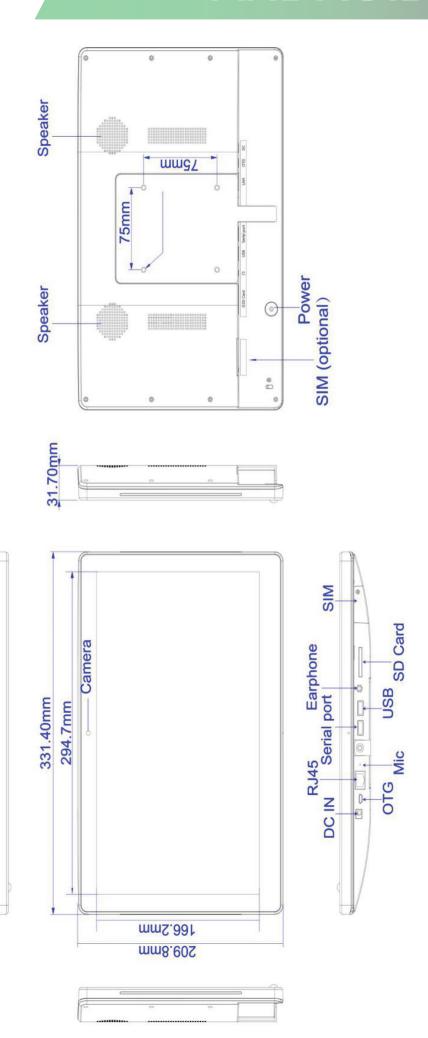











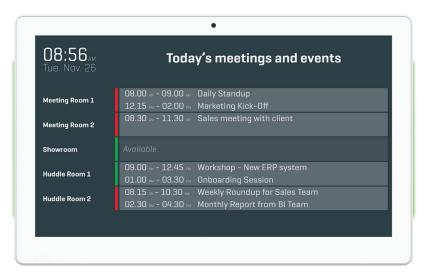





OTHER MODEL TYPES

OPEN FRAME



NARROW BEZEL



STRETCHED LCD



DESK SHAPE



ROOM BOOKING



HEALTH CARE



FLOOR KIOSK



HANGING LCD

