

PRODUCT SHEET


Android Display

27inch Android Touch Display - OS5.1 / 6.0 / 8.1 - RK3288

ArtNr: EL-2702AIO-T

MAIN FEATURES:

- Capacitive Touch Screen / RK3288
- AutoStart by plug in power-adapter
- LCD panel 1920*1080 pixels - IPS
- Internal HD videoplayer 1080P
- Rooted Android 5.1 / 6.0 / 8.1 - RK3288
- Internet access by WIFI / LAN (opt. 3G)
- Internal Speakers
- 3.5mm Jack output
- Thin housing
- Power adapter with 3meter cable
- Usage up to 24 hours per day
- ScrewHoles for hangup / built-in

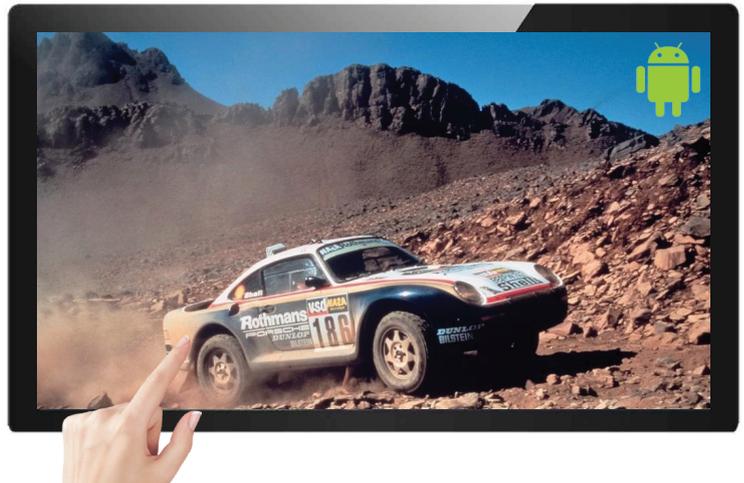


MAIN PURPOSE:

- Digital Signage Display
- Advertisement Display
- Built-in ShopDisplays
- Kiosk Display
- CounterDisplay



Internet access by:

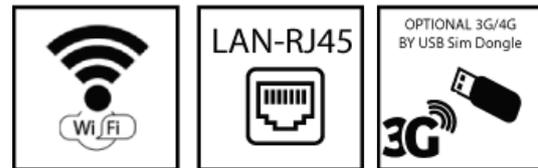

USAGE:

This Android Display can be used in a commercial environment. The Display has Rooted Android operating. This professional display can be used for several solutions to inform / advise people on an attractive way.

SIGNAGE SOFTWARE:

We can provide several kinds of software apps to play your content, remotely controlled, like our "Signage App: control content by f.i. Dropbox and "SbEND signage.



OPTIONAL:

- We can install your software on the devices for larger order quantities.
- Internal memory can be upgraded.
- Similar sizes available: 7 / 10 / 14 / 15.6 / 18.5 / 21.5 / 24 / 27 / 32 / 43 / 55 inch.
- Several kinds of brackets for hangup



Next pages: technical specs and drawing

PRODUCT SHEET

Android Display

27inch Android Touch Display - OS5.1 / 6.0 / 8.1 - RK3288

ArtNr: EL-2702AIO-T

SPECIFICATIONS

System	CPU	Quad core cortex A17,1.8G,RK3288
	RAM	2GB
	Internal memory	16GB
	Operation system	Android 5.1 / 6.0 / 8.1
	Touch screen	10-Point capacitive touch screen
Display	Panel	27"LCD full HD screen,LED backlight
	Resolution	1920*1080
	Active area	597.6(H)X336.15mm(V)
	Display mode	Normally black,IPS
	Viewing angles	89/89(H),89/89(V)
	Contrast ratio	1000
	Luminance	250cdm2
	Aspect Ratio	,16:9
Network	WiFi	802.11b/g/n
	3G dongle	3G USB dongle ext.
	Ethernet	100M/1000M Ethernet
	Bluetooth	Bluetooth 4.0
Interface	Card slot	SD,Support up to 32GB
	USB Device	Mini USB OTG
	USB Hostx2	USB Host 2.0
	Power Jack	DC power input
	RJ45	Ethernet
	HDMI	HDMI output
	Earphone	3.5mm earphone
Media plays	Video format	MPEG-1,MPEG-2,MPEG-4,H.263,H.264,RV etc.,support up to 1080p
	Audio format	MP3/WMA/AAC etc.
	Photo	jpeg
Others	Power consumption	40W
	Wall mounting	VESA,100x100mm
	Speaker	2*3W
	Language	Multi-language
	Working temp	0--40degree
	Certificates	CE/FCC/RoHS
	Adapter	Adapter,12V,4A
Accessories		User manual
		Adapter
		Stand

Product Measurement, mm								
Unit (without packaging)			Giftbox (With Packaging) 1pc			Carton 2pc/ctn		
L	W	H	L	W	H	L	W	H
653	32.5	420	725	115	490	740	250	515
Net(kg) 5.2			Net(kg) 7.1			Net(kg) 14.2		
G.W. 15.4 KG								

Next page Drawing

PRODUCT SHEET

Android Display

27inch Android Touch Display - OS5.1 / 6.0 / 8.1 - RK3288

ArtNr: EL-2702AIO-T

DRAWINGS

