ANDROID OS

Art. EL-1013AIO-T-CD

ANDROID (non)TOUCH DISPLAYS

The state of the s

AVAILABLE SIZES: 8 - 10.1 - 13.3 - 15.6 - 17.3inch

RETAIL BUSINESS

Android Displays for use in a commercial environment. These displays have a rooted Android operating system and can be used for several solutions to inform and advise people in an attractive way, 24-7.

ONLINE MODELS

Often used in retail displays and built-in ShopDisplays or in Public environments.



TOUCH & PANEL

- 10 points capacitive touch
- Optional: non touch panel
- 10" High Resolution Panel 800x1280 pixels
- 24-7 Usage



ANDROID CHIP & OS VERSIONS

- RK3288 with Android OS 8.1
- RK3568 with Android OS 11



ADDITIONAL FEATURES:

- PoE: Power over Ethernet
- NFC & RFID (optional)
- Triggering: pushbuttons, sensors
- LED light: external lightstrips

Note:

There is no signage software installed, please provide your own software or we can provide dedicated signage software.

ANDROID ROOTED

All our models have Rooted Android. The OS system can be adjusted according your needs.

YOUR SOFTWARE

We can pre-install your software apps on the Android OS. We can also make your OS image custommade, with your startup logo.



AutoStart by plug in power adapter



WIFI and LAN for internet connection (optional SIM USB dongle)



ANDROID OS

SOFTWARE OPTIONS

ADD: YOUR SOFTWARE

We can pre-install your software apps on the Android OS. We can also make your OS image custommade, with your startup logo.

ADD: SIGNAGE SOFTWARE

We can provide software apps on the Android OS. Find some suggestions below:

KIOWARE: Lockdown your website or your app (kiosk mode)

FULLY VIDEO: AutoStart App loop video from USB & Internal Memory

FULLY WEBSITE: Lockdown your website in full screen mode

SIGN CONTROLL: Remote controlled pushed presentations with web-based control system (CMS). Create in the CMS presentations and schedule them, online.

ROOM & DESK SHARING: Roombooking and Desk Sharing software

Optional: add external Triggers & Sensors for Video Activation

Customized Android displays to connect triggers for video & volume activation:

- · Metal or plastic pushbuttons with lightring and symbol
- · Touchless sensor buttons (wave your hand above the sensor)
- · RFID Sensors for "Lift and Learn"
- · RFID Sensors for scanning a product with RFID sticker
- · Motion detection sensors
- Light Sensors detection area



Optional: add (Interactive) LED Light strips and panels

Customized Android displays to connect LED lightning:

- · LED strips or LED Panel Light up your product
- · Light up a product during an activated video
- · Light up a brand logo in a retail display
- · Different colors available





SPECIFICATIONS:


CPU			CPU				DK3300 Dual	core 472.	und core	A52	
Internal memory 16GB										Maa	
Internal memory 1668	Sy	stem									
Touch screen S-Point capacitive touch			Internal mem	ory							
Panel 10.1*LCD panel Resolution 1280*800 Viewing angle 85/85/85/85/(LP/U/D)			Operation sys	stem			Android 7.1/10.0				
Resolution			Touch screen				5-Point capac	itive touch			
Viewing angle			Panel				10.1"LCD panel				
Display mode			Resolution				1280*800				
Contrast ratio			Viewing angle	е			85/85/85/85(L	/R/U/D)			
Luminance	Dis	splay	Display mode	Э			Normally blac	k			
Aspect Ratio 16:10			Contrast ratio)			800				
Network Ethernet			Luminance				250cd/m2				
Release			Aspect Ratio				16:10				
Release			WiFi								
Card slot	Network		Ethernet								
USB			Buletooth				Bluetooth 4.2				
USB			Card slot			TF,support up	to 64GB				
USB							USB slave				
HDMI			USB				USB 3.0 host				
Power jack DC power input							USB 2.0 host				
Earphone 3.5mm earphone with microphone USB	Int	erface	HDMI				HDMI output				
Earphone 3.5mm earphone with microphone USB			Power jack				DC power inp	ut			
USB									crophone)	
RJ45 Ethernet interface, (POE function optional IEEE802.3at,POE+,class 4, 25.5W) Video format MPEG-1,MPEG-2,MPEG-4,H.265,H.264,VC-1,VP8,VP9, etc.,support up to 4K											
Video format			RJ45							ion optional IEEE802.3at,POE+,class 4, 25.5W)	
Media play Audio format MP3/WMA/AAC etc. Photo jpeg Battery Optional 4500mAh NFC Optional ,NFC 13.56MHz, ISO14443A/ISO14443B/ISO 15693/Mifare classic/Sony felica Microphone Single microphone Speaker 2*1W Camera Routine angle 5.0MP Language Multi-language Working temp 0-40degree Certificates CE/FCC Color White/black Adapter Adapter, 12V/1.5A			Video format								
Photo jpeg	Med	lia play	Audio format								
Battery											
NFC Optional ,NFC 13.56MHz, ISO14443A/ISO14443B/ISO 15693/Mifare classic/Sony felica Microphone Single microphone Speaker 2*1W Camera Routine angle 5.0MP Understand the composition of the composit			Battery					mAh			
Microphone Single microphone							Optional .NFC	13.56MH	, ISO14	443A/ISO14443B/ISO 15693/Mifare classic/Sony felica	
Speaker 2*1W Camera Routine angle 5.0MP Language Multi-language Working temp 040degree Certificates CE/FCC Color White/black Adapter Adapter, 12V/1.5A											
Camera Routine angle 5.0MP Other Language Multi-language Working temp 0-40degree Certificates CE/FCC Color White/black Adapter Adapter, 12V/1.5A											
Other Language Multi-language Working temp 040degree Certificates CE/FCC Color White/black Adapter Adapter, 12V/1.5A								5.0MP			
Working temp	0	ther									
Certificates CE/FCC Color White/black Adapter Adapter, 12V/1.5A		-		D				-			
Color White/black Adapter Adapter, 12V/1.5A				r							
Adapter Adapter,12V/1.5A											
								1.5A			
you you	Acce	essories	_								
			Joor manual				,				
	- do-4 Mar										
										1	
			Giftbox (With Packaging)								
it (Without packaging) Giftbox (With Packaging) Carton 8pcs/CTN	L	W	н	L	W	Н	L	W	Н		
		KG		Not/ka)	KG		Net	KG		-	
t (Without packaging) Giftbox (With Packaging) Carton 8pcs/CTN L W H L W H L W H	(ka)										
t (Without packaging) Giftbox (With Packaging) Carton 8pcs/CTN	(kg)	KG		IVEL(Kg)						1	





ANDROID OS

DRAWING:

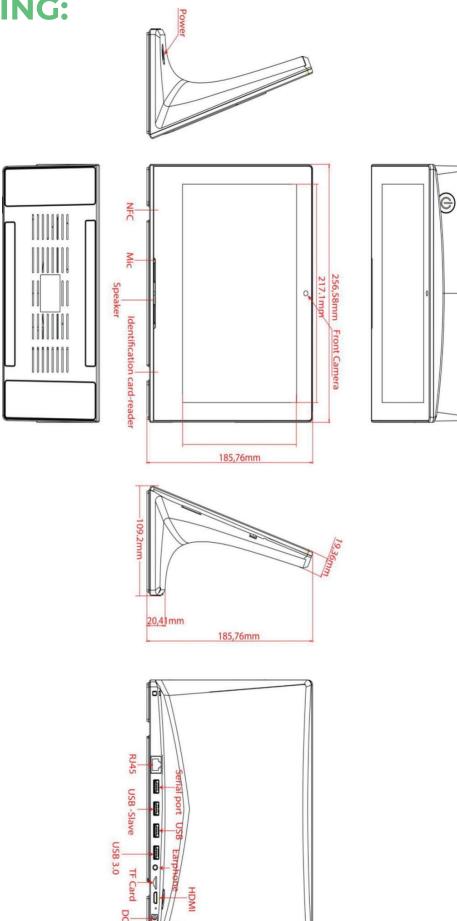



OTHER MODEL TYPES

OPEN FRAME



STRETCHED LCD



ROOM BOOKING



FLOOR KIOSK



NARROW BEZEL



DESK SHAPE





HEALTH CARE



HANGING LCD

