PLEASE COMMENT ON THE HOTEL CATERIN

CTAR

Art. EL-1418AIO-T-CD

ANDROID (non)TOUCH DISPLAYS

AVAILABLE SIZES: 8 - 10.1 - 13.3 - 15.6 - 17.3inch

> Android Displays for use in a commercial environment. These displays have a rooted Android operating system and can be used for several solutions to inform and advise people in an attractive way, 24-7.

ONLINE MODELS

Often used in retail displays and built-in ShopDisplays or in Public environments.



RETAIL

BUSINESS

TOUCH & PANEL

- 10 points capacitive touch
- Optional: non touch panel
- -14" High Resolution Panel 800x1280 pixels
- 24-7 Usage



ANDROID CHIP & OS VERSIONS

- RK3288 with Android OS 8.1
- RK3566 with Android OS 11
- RK3399 with Android 10



ADDITIONAL FEATURES:

- PoE: Power over Ethernet
- NFC & RFID (optional)
- Triggering: pushbuttons, sensors
- LED light: external lightstrips

Note:

There is no signage software installed, please provide your own software or we can provide dedicated signage software.

ANDROID ROOTED

All our models have Rooted Android. The OS system can be adjusted according your needs.

YOUR SOFTWARE

We can pre-install your software apps on the Android OS. We can also make your OS image custommade, with your startup logo.



AutoStart by plug in power adapter



WIFI and LAN for internet connection (optional SIM USB dongle)



SOFTWARE OPTIONS

ADD: YOUR SOFTWARE

We can pre-install your software apps on the Android OS. We can also make your OS image custommade, with your startup logo.

ADD: SIGNAGE SOFTWARE

We can provide software apps on the Android OS. Find some suggestions below:

KIOWARE: Lockdown your website or your app (kiosk mode)

FULLY VIDEO: AutoStart App loop video from USB & Internal Memory

FULLY WEBSITE: Lockdown your website in full screen mode

SIGN CONTROLL: Remote controlled pushed presentations with web-based control system (CMS). Create in the CMS presentations and schedule them, online.

ROOM & DESK SHARING: Roombooking and Desk Sharing software

Optional: add external Triggers & Sensors for Video Activation

Customized Android displays to connect triggers for video & volume activation:

- Metal or plastic pushbuttons with lightring and symbol
- · Touchless sensor buttons (wave your hand above the sensor)
- RFID Sensors for "Lift and Learn"
- · RFID Sensors for scanning a product with RFID sticker
- Motion detection sensors
- · Light Sensors detection area



Optional: add (Interactive) LED Light strips and panels

Customized Android displays to connect LED lightning:

- LED strips or LED Panel Light up your product
- Light up a product during an activated video
- Light up a brand logo in a retail display
- Different colors available



П

SPECIFICATIONS:

	CPU	RK3568 Quad core cortex A55				
System	RAM	2GB Optional4GB				
oystem	Internal memory	16GB Optional32GB				
	Operation system	Android 11				
	Touch screen	10-Point capacitive touch				
	Panel	14"LCD panel				
	Resolution	1920*1080				
Display Network	Display mode	Normally black				
	Viewing angle	85/85/85/85(L/R/U/D)				
	Contrast ratio	800				
	Luminance	250cd/m2				
	Aspect Ratio	16:9				
	WiFi	802.11b/g/n				
	Ethernet	10M/100M				
	Buletooth	Bluetooth 4.2				
	Card slot	TF,support up to 64GB				
	USB	USB slave				
	USB	USB 2.0 host				
	USB	USB 3.0 host				
Interface	HDMI	HDMI output,up to 4K				
	Power jack	DC power input				
	Earphone	3.5mm earphone with microphone				
	USB	USB for serial(TTL Level)				
	RJ45	Ethernet interface, (POE function optional IEEE802.3at,POE+,class 4, 25.5W)				
	Video format	MPEG-1, MPEG-2, MPEG-4, H.265, H.264, VC-1, VP8, VP9, etc., support up to 4K				
Media play	Audio format	MP3/WMA/AAC etc.				
	Photo	jpeg/png				
	Battery	Optional 4500mAh				
	NFC	Optional ,NFC 13.56MHz, ISO14443A/ISO14443B/ISO 15693/Mifare classic/Sony felica				
	RFID	Optional, 125k,ISO/IEC 11784/11785,Support to EM4100, TK4100/GK4100, EM4305, T5577				
	4G Module	Optional				
	Microphone	standard dual microphone				
	Speaker	2*3W				
	Camera	Standard monocular wide-angle 2.0MP, optional Binocular routine-angle 5MP				
Other	Language	Multi-language				
	Working temp	040degree				
	Certificates	CE/FCC				
	Color	White/black				
	Adapter	Adapter,12V/2A				
Accessories	User manual	Ves				
		· · · · ·				

Product Measurement, mm


Unit (Without packaging)			Giftbox (With Packaging)			Carton 4pcs/CTN		
L	W	Н	L	W	Н	L	W	Н
Net(kg)	KG		Net(kg)	KG		Net	KG	
						G.W		







0

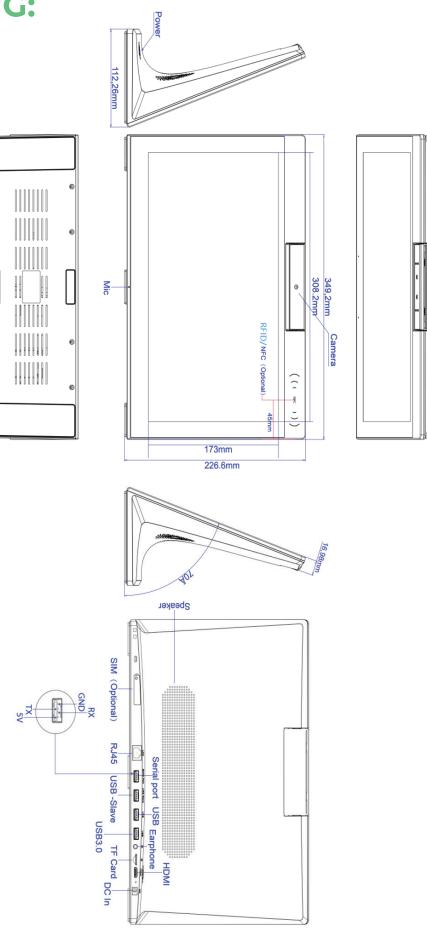

OTHER MODEL TYPES

OPEN FRAME



NARROW BEZEL



STRETCHED LCD



ROOM BOOKING



Constants with (

DESK SHAPE



HEALTH CARE



FLOOR KIOSK



HANGING LCD

