

ANDROID INCELL-TOUCH

ULTRA NARROW BEZEL



AVAILABLE SIZES:
15.6 - 21.5 - 24 - 32 inch

RETAIL BUSINESS

These touch displays comes with Android OS and HDMI IN with a stylish small bezel. Rooted OS and can be used for several solutions to inform and advise people in an attractive way, 24-7.

ONLINE MODELS

Often used in retail displays and built-in ShopDis-plays or in Public environments.



TOUCH & PANEL

- 10 points capacitive incell-touch - laminated
- 24" High Resolution Panel 1920x1080 pixels
- 24-7 Usage
- RK3588S2 + HDMI IN



ANDROID CHIP & OS VERSIONS

- RK3588S2 with Android OS 13
- RK3576 with Android OS 14
- RK3568 with Android OS 14



ADDITIONAL FEATURES:

- PoE: Power over Ethernet (up to 24inch)
- NFC & RFID (optional)
- Triggering: pushbuttons, sensors
- LED light: external lightstrips

Note:

There is no signage software installed, please provide your own software or we can provide dedicated signage software.

ANDROID ROOTED

All our models have Rooted Android. The OS system can be adjusted according your needs.

YOUR SOFTWARE

We can pre-install your software apps on the Android OS. We can also make your OS image custommade, with your startup logo.



Easy hangup system at backside (VESA Screw holes plate)



AutoStart by plug in power adapter



WIFI 6 or WIFI 6E* and LAN for internet connection (optional SIM USB dongle)

* depending on the type of model.



SOFTWARE OPTIONS

ADD: YOUR SOFTWARE

We can pre-install your software apps on the Android OS. We can also make your OS image custommade, with your startup logo.

ADD: SIGNAGE SOFTWARE

We can provide software apps on the Android OS. Find some suggestions below:

KIOWARE: Lockdown your website or your app (kiosk mode)

FULLY VIDEO: AutoStart App loop video from USB & Internal Memory

FULLY WEBSITE: Lockdown your website in full screen mode

ICHANNEL: Remote controlled pushed presentations with web-based control system (CMS). Create in the CMS presentations and schedule them, online.

ROOM & DESK SHARING: Roombooking and Desk Sharing software

Optional: add external Triggers & Sensors for Video Acti-

Customized Android displays to connect triggers for video & volume activation:

- Metal or plastic pushbuttons with lightring and symbol
- Touchless sensor buttons (wave your hand above the sensor)
- RFID Sensors for "Lift and Learn"
- RFID Sensors for scanning a product with RFID sticker
- Motion detection sensors
- Light Sensors detection area



Optional: add (Interactive) LED Light strips and panels


Customized Android displays to connect LED lightning:

- LED strips or LED Panel Light up your product
- Light up a product during an activated video
- Light up a brand logo in a retail display
- Different colors available




SPECIFICATIONS:

System	CPU	RK3588 Quad core cortex A55+Quad core cortex A76
	RAM	4GB Optional 8GB
	Internal memory	32GB Optional 64GB
	Operation system	Android 12
Display	Panel Size	32"LCD
	Panel Type	IPS
	Resolution	1920*1080
	Display Colors	16.7M Colors
	Color Gamut	sRGB 99%
	Display mode	Normally black
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1000:1
	Luminance	250cdm2
	Aspect Ratio	16:9
	Response Time	14ms
	Back-light Type	Eled
	Touch	Model Type
Number of points		10-Point
Interface for touch		HID-USB
Network	WiFi	802.11b/g/n/a/ac/ax (WiFi 6)
	Ethernet	100M/1000M
	Bluetooth	Bluetooth 5.0
Interface	Power Jack	DC power input
	MIC IN	External microphone input
	Earphone Output	3.5mm earphone output
	Type-c	Full Function (Except for charging function)
	SIM Slot	Optional 4G/5GModule
	USB Host or USB touch	Standard USB Host, Optional USB touch function
	USB	USB 3.0
	USB	USB 3.0
	HDMI IN	Support HDMI 2.0
	RJ45	Ethernet interface
Earphone	3.5mm earphone	
Media plays	Video format	MPEG-1,MPEG-2,MPEG-4,H.265,H.264,H.263,VC-1,VP8,VP9,MVC,AV1, etc.,max support up to8K@60fps
	Audio format	MP3/WMA/AAC/WAV/OGG, etc
	Photo	jpeg/png/gif,etc
Other	Product Colors	white/Black
	VESA	100mm*100mm
	Button	Power/Vol+/Vol-
	Speaker	40*5W*2
	Microphone	Built in dual Microphone , Support noise reduction and echo cancellation
	NFC	Optional , 13.56MHz. ISO14443A/ISO14443B/ISO 15693/Mifare classic/Sony felica
	G-sensor	Support 90 degrees
	Camera	Optional External USB type camera (2.0MPor 5.0MP)
	Language	Multi-language
	Certificates	CE/FCC
Power	Power Type	Adapter
	Input Voltage	DC 12V/5A
	Power consumption	≤30W
Working Surrounding	Storage Temperature	-20℃—60℃
	Working Temperature	0℃—50℃ 10—90%RH
Accessories	Adapter	Adapter,12V/5A
	User manual	yes

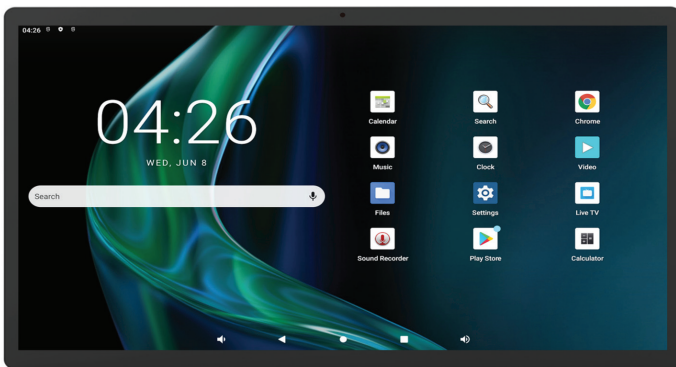

DRAWING:

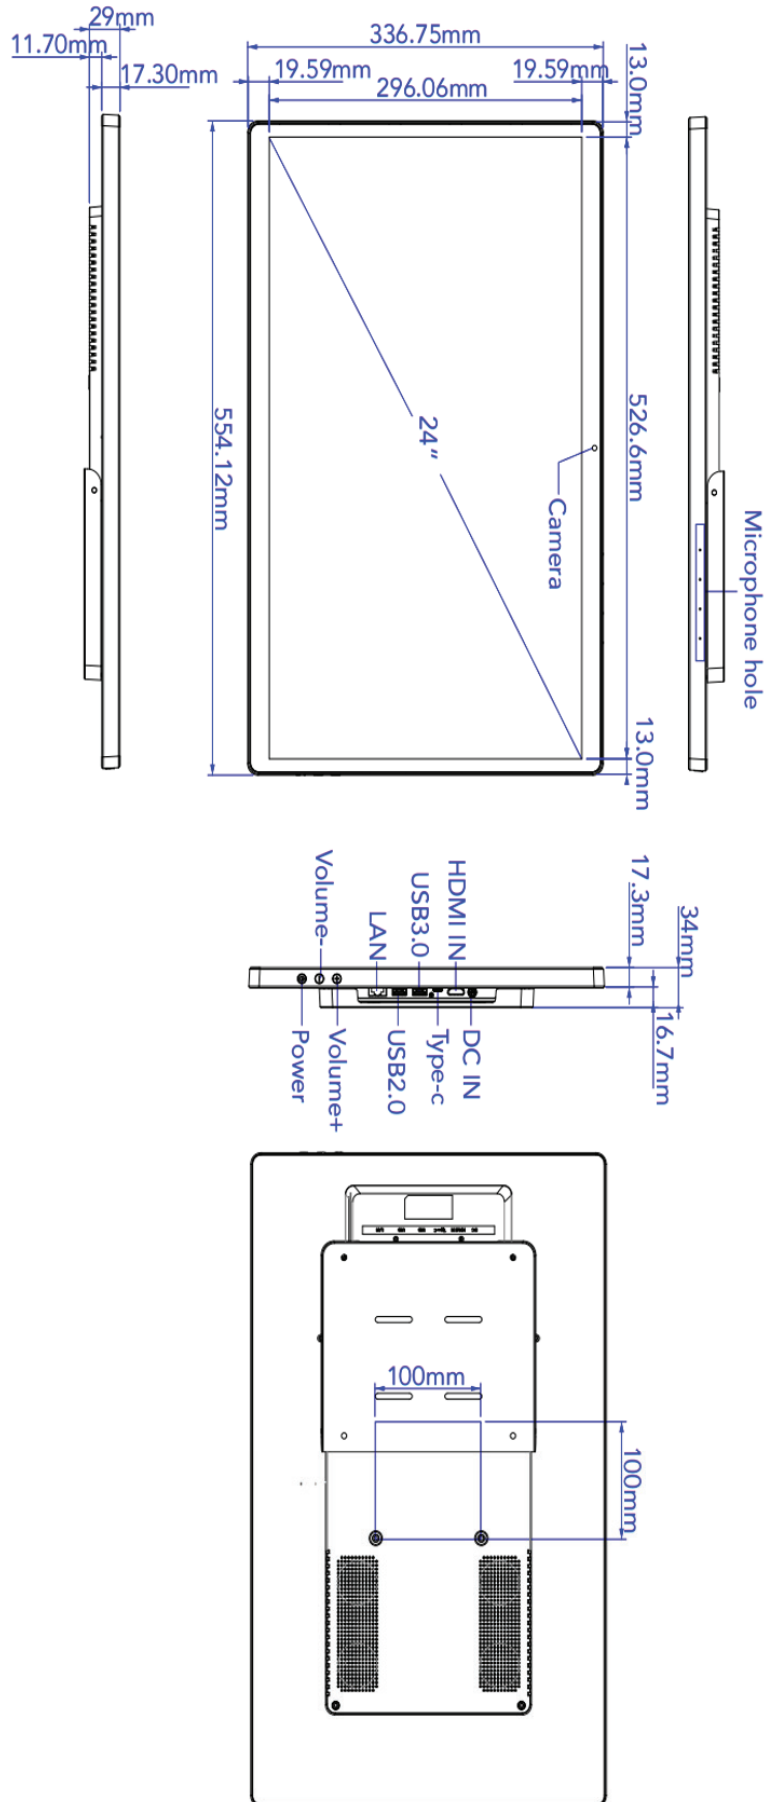


OTHER MODEL TYPES

OPEN FRAME



NARROW BEZEL

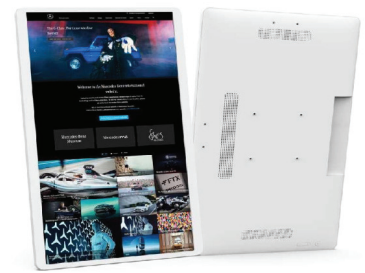


STRETCHED LCD



DESK SHAPE



ROOM BOOKING

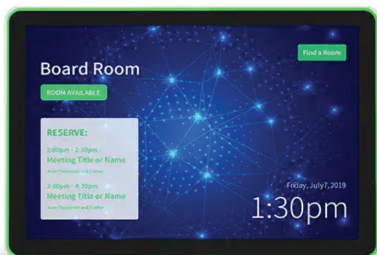

HEALTH CARE



FLOOR KIOSK



HANGING LCD

