

PRODUCT SHEET

Android Display

55inch Android Touch Display - OS5.1 / 6.0 / 8.1 - RK3288

ArtNr: EL-5502AIO-T

MAIN FEATURES:

- Capacitive Touch Screen / RK3288
- AutoStart by plug in power-adapter
- LCD panel 1920*1080 pixels - IPS
- Internal HD videoplayer 1080P
- Rooted Android 5.1 / 6.0 / 8.1 - RK3288
- Internet access by WIFI / LAN (opt. 3G)
- Internal Speakers
- 3.5mm Jack output
- Thin housing
- Power adapter with 3meter cable
- Usage up to 24 hours per day
- ScrewHoles for hangup / built-in




MAIN PURPOSE:

- Digital Signage Display
- Advertisement Display
- Built-in ShopDisplays
- Kiosk Display
- CounterDisplay



Internet access by:

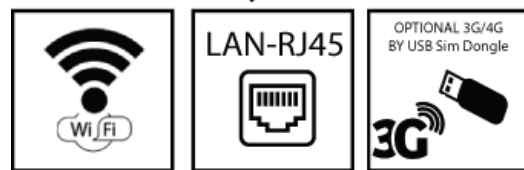


USAGE:

This Android Display can be used in a commercial environment. The Display has Rooted Android operating. This professional display can be used for several solutions to inform / advise people on an attractive way.

SIGNAGE SOFTWARE:

We can provide several kinds of software apps to play your content, remotely controlled, like our "Signage App: control content by f.i. Dropbox and "SbEND signage.

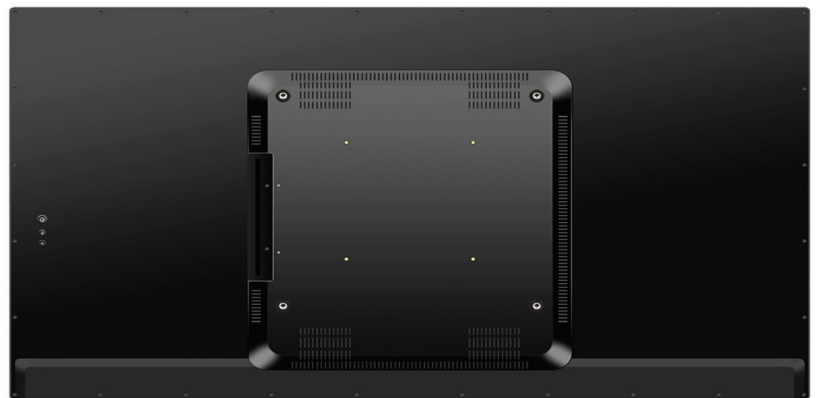

OPTIONAL:

- We can install your software on the devices for larger order quantities.
- Internal memory can be upgraded.
- Similar sizes available: 7 / 10 / 14 / 15.6 / 18.5 / 21.5 / 24 / 27 / 32 / 43 / 55 inch.
- Several kinds of brackets for hangup



Next pages: technical specs and drawing

PRODUCT SHEET

Android Display

55inch Android Touch Display - OS5.1 / 6.0 / 8.1 - RK3288

ArtNr: EL-5502AIO-T

SPECIFICATIONS:

System	CPU	Quad core cortex A17,1.8G,RK3288
	RAM	2GB
	Internal memory	16GB
	Operation system	Android 5.1 / 6.0 / 8.1
	Touch screen	10-Point ,G+G
Display	Screen	55" 4K screen
	Resolution	3840*2160
	Display mode	Normally black,IPS
	Active area	1387.8mm,diagonal
	Viewing angles	89/89(H),89/89(V)
	Contrast ratio	1200
	Luminance	300cdm2
	Display mode	Normal black,IPS
Network	Aspect Ratio	,16:9
	WiFi	802.11b/g/n
	Ethernet	100M/1000M Ethernet
Interface	Bluetooth	Bluetooth 4.0
	Card slot	SD,Support up to 32GB
	USB Device	Mini USB OTG
	USB Hostx2	USB Host 2.0
	RJ45	Ethernet
	HDMI	HDMI output
Media plays	Earphone	3.5mm earphone
	Video format	MPEG-1,MPEG-2,MPEG-4,H.263,H.264,RV etc.,support up to 1080p
	Audio format	MP3/WMA/AAC etc.
Others	Photo	jpeg
	Power consumption	120W
	Wall mounting	VESA,400x400mm
	Speaker	2*5W
	Language	Multi-language
	Working temp	0--40degree
	Certificates	CE/FCC/RoHS
Accessories	Power	AC100-240V
		User manual

Product Measurement, mm								
Unit (without packaging)			Giftbox (With Packaging) 1pc			Carton		
L	W	H	L	W	H	L	W	H
1263.18	747.28	56.5						
Net(kg) 7.6			Net(kg)			Net(kg)		

G.W.

Next page Drawing

PRODUCT SHEET

Android Display

55inch Android Touch Display - OS5.1 / 6.0 / 8.1 - RK3288

ArtNr: EL-5502AIO-T

DRAWINGS:

