

PRODUCT SHEET

Android Display

32inch Android Touch Display - OS5.1 / 6.0 / 8.1 - RK3288

ArtNr: EL-3202AIO-T

MAIN FEATURES:

- 10 points Capacitive Touchscreen
- AutoStart by plug in power-adapter
- LCD panel 1920*1080 pixels - IPS
- Internal HD videoplayer 1080P
- Rooted Android 5.1 / 6.0 / 8.1 - RK3288
- Internet access by WIFI /LAN (opt. 3G)
- Internal Speakers
- 3.5mm Jack output
- Thin housing
- Power adapter with 3meter cable
- Usage up to 24 hours per day
- ScrewHoles for hangup / built-in




MAIN PURPOSE:

- Digital Signage Display
- Advertisement Display
- Built-in ShopDisplays
- Kiosk Display
- CounterDisplay



Internet access by:

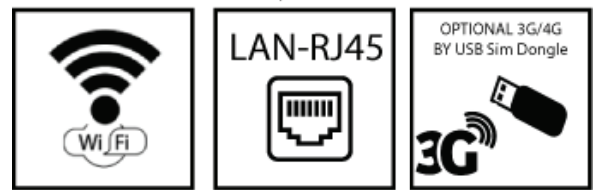

USAGE:

This Android Display can be used in a commercial environment. The Display has Rooted Android operating. This professional display can be used for several solutions to inform / advise people on an attractive way.

SIGNAGE SOFTWARE:

We can provide several kinds of software apps to play your content, remotely controlled, like our "Signage App: control content by f.i. Dropbox and "SbEND signage.

OPTIONAL:

- We can install your software on the devices for larger order quantities.
- Internal memory can be upgraded.
- Similar sizes available: 7 / 10 / 14 / 15.6 / 18.5 / 21.5 / 24 / 27 / 32 / 43 / 55 inch.
- Several kinds of brackets for hangup



Next pages: technical specs and drawing

All rights reserved. Changes to specifications and descriptions may be made at any time without prior notice.

PRODUCT SHEET

Android Display

32inch Android Touch Display - OS5.1 / 6.0 / 8.1 - RK3288

ArtNr: EL-3202AIO-T

SPECIFICATIONS

| | | |
|--------------------|-------------------|--|
| System | CPU | Quad core cortex A17,1.8G,RK3288 |
| | RAM | 2GB |
| | Internal memory | 16GB |
| | Operation system | Android 5.1 / 6.0 / 8.1 |
| | Touch screen | 10-Point capacitive touch screen |
| Display | Panel | 32"LCD full HD IPS screen,LED backlight |
| | Resolution | 1920*1080 |
| | Active area | 698.4(H)x392.85mm(V) |
| | Display mode | Normally black,IPS |
| | Viewing angles | 89/89(H),89/89(V) |
| | Contrast ratio | 3000 |
| | Luminance | 250cdm2 |
| | Aspect Ratio | ,16:9 |
| Network | WiFi | 802.11b/g/n |
| | 3G dongle | 3G USB dongle ext. |
| | Ethernet | 100M/1000M Ethernet |
| | Bluetooth | Bluetooth 4.0 |
| Interface | Card slot | SD,Support up to 32GB |
| | USB Device | Mini USB OTG |
| | USB Hostx2 | USB Host 2.0 |
| | Power Jack | DC power input |
| | RJ45 | Ethernet |
| | HDMI | HDMI output |
| | Earphone | 3.5mm earphone |
| Media plays | Video format | MPEG-1,MPEG-2,MPEG-4,H.263,H.264,RV etc.,support up to 1080p |
| | Audio format | MP3/WMA/AAC etc. |
| | Photo | jpeg |
| Others | Power consumption | 50W |
| | Wall mounting | VESA,100x100mm |
| | Speaker | 2*3W |
| | Language | Multi-language |
| | Working temp | 0--40degree |
| | Certificates | CE/FCC/RoHS |
| | Adapter | Adapter,12V,5A |
| Accessories | | User manual |
| | | Adapter |
| | | Stand |

| Product Measurement, mm | | | | | | | | |
|--------------------------|----|-----|-------------------------------------|-----|-----|-----------------------|-----|-----|
| Unit (without packaging) | | | Giftbox (With Packaging) 1pc | | | Carton 2pc/ctn | | |
| L | W | H | L | W | H | L | W | H |
| 750 | 40 | 475 | 862 | 135 | 555 | 880 | 295 | 580 |
| Net(kg) 7.6 | | | Net(kg) 10.1 | | | Net(kg) 20.2 | | |
| G.W. 21.9 KG | | | | | | | | |

Next page Drawing

PRODUCT SHEET

Android Display

32inch Android Touch Display - OS5.1 / 6.0 / 8.1 - RK3288

ArtNr: EL-3202AIO-T

DRAWINGS

