PRODUCT SHEET

Android Display

55inch Android Non Touch Display - OS7.1 / 9.0 - RK3399

ArtNr: EL-5503AIO

MAIN FEATURES:

- AutoStart by plug in power-adapter
- LCD panel 1920x1080 pixels
- Internal HD videoplayer 1080P
- Rooted Android 7.1 / 9.0 RK3399
- Internet access by WIFI / LAN (opt. 3G)
- Internal Speakers 2x2 W
- 3.5mm Jack output
- Thin housing
- Remote Control
- Power adapter with 3meter cable
- Usage up to 24 hours per day
- Screw Holes for hangup / built-in

MAIN PURPOSE:

- Digital Signage Display
- Advertisement Display
- Built-in ShopDisplays
- Kiosk Display
- CounterDisplay

USAGE:

This Android Display can be used in a commercial environment. The Display has Rooted Android operating. This professional display can be used for several solutions to inform advise people in an attractive way.

SIGNAGE SOFTWARE:

We can provide several kinds of software apps to play your content, remotely controlled, like our "Signage App: control content by f.i. Dropbox and "SbEND signage.

OPTIONAL:

- We can install your software on the devices for larger order quantities.
- Internal Memory can be upgraded.
- Similar sizes available: 14 / 15.6 / 18.5 / 21.5 / 24 / 27 / 32 / 43 / 55 inch.
- Several kinds of brackets for hangup.


























Internet access by:







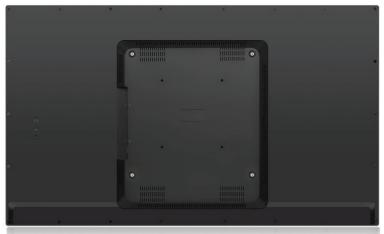



Next pages: technical specs and drawing

PRODUCT SHEET Android Display 55inch Android Non Touch Display - OS7.1 / 9.0 - RK3399

ArtNr: EL-5503AIO

SPECIFICATIONS:

System	CPU	Dual-core A72+quad-core A53,2.0G,RK3399	
	RAM	2GB	
	Internal memory	16GB	
	Operation system	Android 7.1 / 9.0	
	Touch screen	Non Touch	
	Screen	55"LCD 4K screen,LED backlight,IPS	
	Resolution	3840*2160	
	Display mode	Normally black, IPS	
	Active area	1387.8mm,diagonal	
Display	Viewing angles	89/89(H),89/89(V)	
	Contrast ratio	1200	
	Luminance	300cdm2	
	Display mode	Normal black,IPS	
	Aspect Ratio	,16:9	
	WiFi	802.11b/g/n/ac, 2.4G+5G	
Network	Ethernet	100M/1000M Ethernet	
	Bluetooth	Bluetooth 4.0	
	Card slot	SD,Support up to 32GB	
	USB Device	Mini USB OTG	
luta of a a a	USB Hostx2	USB Host 2.0	
Interface	RJ45	Ethernet	
	HDMI	HDMI output	
	Earphone	3.5mm earphone	
	Video format	MPEG-1,MPEG-2,MPEG-4,H.263,H.264,RV etc.,support up to 1080p	
Media plays	Audio format	MP3/WMA/AAC etc.	
	Photo	jpeg	
	Power consumption	120W	
	Wall mounting	VESA,400x400mm	
	Speaker	2*5W	
Others	Language	Multi-language	
	Working temp	040degree	
	Certificates	CE/FCC/RoHS	
	Power	AC100-240V	
		User manual	
Accessories			

Unit (Without packaging)			Giftbox (With Packaging)			Carton 1PCS		
L	W	Н	L	W	Н	L	W	Η
1263.18mm	747.28mm	56.5mm				1435mm	175mm	1020mm
Net(kg)	31.45kg		Net(kg)			Net		
						G.W	39.75kg	

55inch Android Non Touch Display - OS7.1 / 9.0 - RK3399

ArtNr: EL-5503AIO

