

Art. EL-1713AIO-T-CD

ANDROID (non)TOUCH DISPLAYS

AVAILABLE SIZES: 8 - 10.1 - 13.3 - 15.6 - 17.3inch

> Android Displays for use in a commercial environment. These displays have a rooted Android operating system and can be used for several solutions to inform and advise people in an attractive way, 24-7.

ONLINE MODELS

Often used in retail displays and built-in ShopDisplays or in Public environments.



RETAIL

BUSINESS

TOUCH & PANEL

- 10 points capacitive touch
- Optional: non touch panel
- -17,3" High Resolution Panel 800x1280 pixels
- 24-7 Usage



ANDROID CHIP & OS VERSIONS

- RK3288 with Android OS 8.1
- RK3566 with Android OS 11
- RK3399 with Android 10



ADDITIONAL FEATURES:

- PoE: Power over Ethernet
- NFC & RFID (optional)
- Triggering: pushbuttons, sensors
- LED light: external lightstrips

Note:

There is no signage software installed, please provide your own software or we can provide dedicated signage software.

ANDROID ROOTED

All our models have Rooted Android. The OS system can be adjusted according your needs.

YOUR SOFTWARE

We can pre-install your software apps on the Android OS. We can also make your OS image custommade, with your startup logo.



AutoStart by plug in power adapter



WIFI and LAN for internet connection (optional SIM USB dongle)





ANDROID OS

SOFTWARE OPTIONS

ADD: YOUR SOFTWARE

We can pre-install your software apps on the Android OS. We can also make your OS image custommade, with your startup logo.

ADD: SIGNAGE SOFTWARE

We can provide software apps on the Android OS. Find some suggestions below:

KIOWARE: Lockdown your website or your app (kiosk mode)

FULLY VIDEO: AutoStart App loop video from USB & Internal Memory

FULLY WEBSITE: Lockdown your website in full screen mode

SIGN CONTROLL: Remote controlled pushed presentations with web-based control system (CMS). Create in the CMS presentations and schedule them, online.

ROOM & DESK SHARING: Roombooking and Desk Sharing software

Optional: add external Triggers & Sensors for Video Activation

Customized Android displays to connect triggers for video & volume activation:

- Metal or plastic pushbuttons with lightring and symbol
- · Touchless sensor buttons (wave your hand above the sensor)
- RFID Sensors for "Lift and Learn"
- · RFID Sensors for scanning a product with RFID sticker
- Motion detection sensors
- · Light Sensors detection area



Optional: add (Interactive) LED Light strips and panels

Customized Android displays to connect LED lightning:

- LED strips or LED Panel Light up your product
- Light up a product during an activated video
- Light up a brand logo in a retail display
- Different colors available



SPECIFICATIONS:


		CPU				RK3399 [RK3399 Dual-core A72+quad-core A53				
		RAM				2GB 4GB					
Sys	stem	Internal memory				16GB 32GB					
		Operation system				Android 7.1/10.0					
		Touch screen				10-Point capacitive touch					
		Panel				17.3"LCD panel					
		Resolution				1920*1080					
		Display mode				Normally black					
Disr	play	Viewing angle				85/85/85(L/R/U/D)					
		Contrast ratio				800					
		Luminance				250cd/m2					
		Aspect Ratio					16:9				
		WiFi				802.11a/b/g/n/ac					
Netv	work	Ethernet				100M/1000M ethernet					
		Buletooth				Bluetooth 4.2					
		Card slot				TF, support up to 64GB					
1		USB				USB Host 3.0					
		USB				USB Device only					
Interfac		HDMI				HDMI output, support 4K					
	rface	RJ45				Ethernet interface , (POE function optional IEEE802.3at,POE+,class 4, 25.5W)					
		USB Power jack				USB for serial (RS232 format)					
						DC power input					
		Earphone				3.5mm earphone with microphone					
		Video format				MPEG-1,MPEG-2,MPEG-4,H.265,H.264,VC-1,VP8,VP9, etc.,support up to 4K					
Media	a play	Audio format				MP2G-1, MP2G-2, MP2G-4, M22G, M22G, M22G, M2G-1, MP3, MP3, M2G, Support up to 4K					
media piay		Photo				jpeg/PNG					
		Battery				Optional 4500 mAh					
		NFC				Optional VOC MAT					
Other		Speaker				2*2W					
		Camera				Routine angle 5.0MP					
		Microphone				single microphone					
		Working temp									
		Certificates				ce/fcc					
		Language	5			Multi-language					
		Adapter					Adapter, 12V/2A				
Accessories											
		User manual				yes					
Product Me	easurement,	mm									
	ut packaging)		Giftbox (M	Vith Packagi	na)	Carton 2p	ocs/CTN				
	W W	н		W	Н		W	Н			
				**	<u> </u>			+ ''			
Net(kg)	kg		Net(kg)	kg		Net	kg				
						C 144					
						G.W					
						1	1				








ANDROID OS

DRAWING:



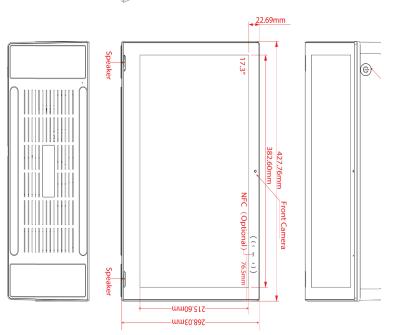





ANDROID OS

OTHER MODEL TYPES

OPEN FRAME



NARROW BEZEL



STRETCHED LCD



ROOM BOOKING



Constants with (

DESK SHAPE



HEALTH CARE



FLOOR KIOSK



HANGING LCD

